Working Memo #<u>S-137</u> Page 1 of 2

DATE: January 17, 1989

TO: Division of Shellfish Sanitation Staff

THROUGH: E. H. Bartsch, P.E., Director

Office of Water Programs

FROM: C. W. Wiley, Director

Division of Shellfish Sanitation


SUBJECT: Plants - Correction for Working Memo #92

The purpose of this working memo is to correct an error on Page 4 of Working Memo #92.

The diagram on Page 4 indicates that a double gate check valve would be adequate protection on a blower tank with a submerged inlet. This is not correct; only an RPZ is acceptable. Noncommunity waterworks must conform to ASSE 1013; private supplies and connections may conform to either ASSE 1012 or ASSE 1013 for this installation.

Remove Page 4 from Working Memo #92 and insert the attached diagram in its place. The current diagram indicates in the lower left corner that it was revised 1/89.

CWW:REC/teb

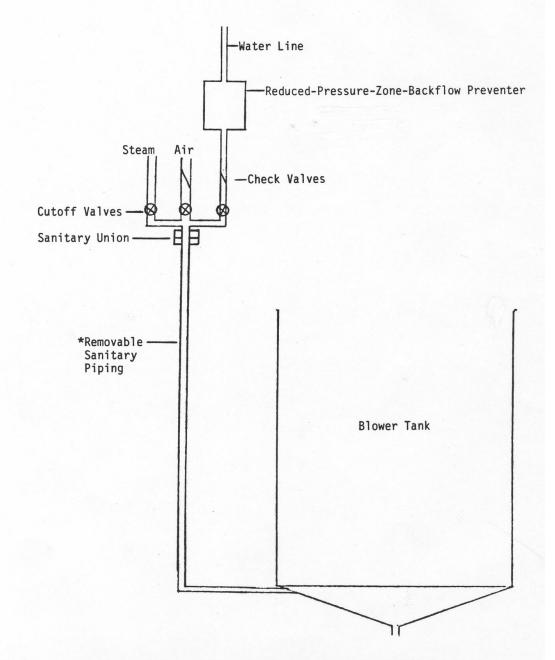

^{*} Must meet all requirements of construction of the Shellfish Industry Construction Guides in the NSSP Manual, Part II, Appendix B. Sanitary features not shown in lower portion of sanitary piping to blower.